


# ZFP Touchscreen Controlled Addressable Fire Panel (Medium Cabinet)

Part No. **ZFP2M/X and derivatives**

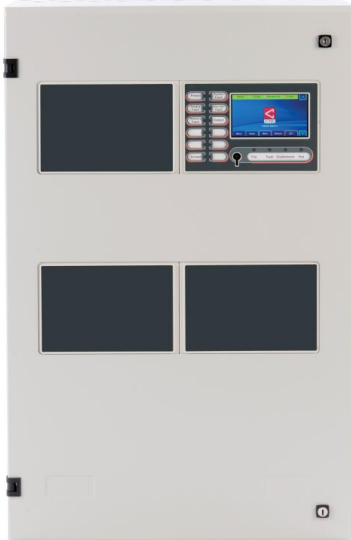

## Overview

A feature-rich touchscreen-controlled addressable fire panel available with 2, 4, 6 or 8 Apollo XP95/Discovery compatible loop drivers (see Key Features section for a full list of ZFP features).

Multiple off-the-shelf variants or build your own panel using our ZFP selection charts.

Rapid loop learn, flexible cause & effects and powerful system diagnostics.

Hi-integrity fault-tolerant RS485 networking option allows up to 128 network nodes (64 main panels and 64 Compact Controllers).

Optional 'A-Bus' expansion PCBs, paging and graphic interface facilities.

Intuitive PC programming tools.

Standard and large sized ZFPs also available with 1, 2, 4, 6 or 8 loops (1 loop in standard cabinet only).

## More Information

ZFP Fire PanelBlank Module

Touchscreen control module (Z41)

3 x Blank modules (ZBLANK)

5A EN54-4 PSU (BF362-5/E)

Loop variantsZFP2M/X2 LoopZFP4M/X4 LoopZFP6M/X6 LoopZFP8M/X8 LoopZFP Fire Panel20 Zonal LEDs

Touchscreen control module (Z41)

20 Programmable zonal indicators with name slots (Z44)

2 x Blank modules (ZBLANK)

5A EN54-4 PSU (BF362-5/E)

Loop variantsZFP6M/20/X6 LoopZFP8M/20/X8 LoopZFP Fire Panel40 Zonal LEDs

Touchscreen control module (Z41)

40 Programmable zonal indicators with name slots (Z47)



2 x Blank modules (ZBLANK)

5A EN54-4 PSU (BF362-5/E)

Loop variants ZFP6M/40/X6 Loop ZFP8M/40/X8 Loop ZFP Fire Panel 20 Zonal LEDs, Printer, 2 Keypswitches

Touchscreen control module (Z41)

20 Programmable zonal indicators with name slots, thermal printer & 2 programmable keyswitches (Z46)

2 x Blank modules (ZBLANK)

5A EN54-4 PSU (BF362-5/E)

Loop variants ZFP6M/20P/X6 Loop ZFP8M/20P/X8 Loop Can't find what you're looking for? Need a panel with more Zonal LEDs, additional relays or extra sounder circuits? Why not build your own ZFP using our ZFP Medium Panel Selection Chart? Simply select the Switch & Indicator Module(s) and A-BUS PCB(s) you need and we'll do the rest - building, testing and shipping the panel to you in no time at all.

## Technical Specifications

Approvals/certifications	Certified to EN54-2/4 by the LPCB (0832-CPD-0758).
Protocol/compatibility	Apollo XP95/Discovery.
Mains supply	230V 50/60Hz.
Mains rated current	1.35A maximum.
Internal power supply	27Vdc nominal.
Total output current limited to	5A @ 230Vac (Imax.A 4A; Imin. 12mA).
Quiescent current	Varies depending on the panel's configuration - refer to our ZFP loop/battery calculation tool for details.
Battery charge capacity	7Ah min to 38Ah max.
Max battery size and type	2 x 12V 38Ah VRLA connected in series.
No. of loop drivers	2, 4, 6 or 8 (dependent on model purchased).
Max. loop output current	500mA (25V min; 34V max).
Max. loop length	1KM.
Max. addressable devices per loop	126.
No. of conventional sounder circuits	2 (Max. length per circuit is 500m).
EOL resistor value	6800 $\Omega$ 5% Tol. 0/25W (blue, grey, red, gold).
Max. sounder output current	2 x 1A.
Auxiliary relays	2 x Programmable Relays (programmable from C&Es). 1 x Fault Relay (active when no faults are present). Volt free single pole changeover. Max. switch current 1A; Max. switch voltage 30Vdc.
Other outputs	24V Aux. Power (19.5V min, 28V max). Protected by a resettable fuse. Max. current 100mA.
Auxiliary inputs	2 x Programmable Inputs (programmable from C&Es). Connect to 0V to trigger, Max. input voltage 27V (non-latching).
PC connection	Via a galvanically isolated USB socket on the Z41 control module.
Pager/DECT connection	RS232. ESPA compatible.
Graphics interface/diagnostics connection	RS485. Drax compatible.
Network connection	RS485 hi-integrity multi-path fault tolerant network connection via optional ZHN network card. Max 128 network nodes (up to 64 main panels & 64 compact controllers).
Indicators	Full-colour 480 x 272 pixel touchscreen, all relevant EN54 indicators plus 5 programmable indicators. Additional indicators dependent on Switch & Indicator module fitted.
Controls	Interactive touchscreen with menu sensitive buttons; 1 x keyswitch allowing direct access to Access Level 2. Additional controls dependent on Switch & Indicator module fitted.
Connections	Fixed, largest acceptable conductor size 1mm <sup>2</sup> .



T 01942 322744

E sales@c-tec.co.uk

F 01942 829867

W www.c-tec.com



C-TEC, Challenge Way, Martland Park, Wigan, WN5 0LD United Kingdom



Expansion connections	RS485 peripheral bus connection allows the connection of up to 15 'A-Bus' PCBs (2 control cores plus screen plus 2 cores for power).
Product dimensions (mm)	450 W x 720 H x 200 D.
Construction & finish	Light grey textured mild steel, 1.2mm Zintec. RAL7035 epoxy paint.
IP Rating	IP30.
Weight	TBC.
Operating conditions/temperature	-5°C to +40°C. Max relative humidity: 95%.
1 Loop Variants	N/A.
2 Loop Variants	Z0250000M/X (Blank Module); Z025020NM/X (20 Zonal LEDs); Z025040NM/X (40 Zonal LEDs); Z025020PM/X (20 Zonal LEDs, Printer, 2 Keyswitches).
4 Loop Variants	Z0450000M/X (Blank Module); Z045020NM/X (20 Zonal LEDs); Z045040NM/X (40 Zonal LEDs); Z045020PM/X (20 Zonal LEDs, Printer, 2 Keyswitches).
6 Loop Variants	Z0650000M/X (Blank Module); Z065020NM/X (20 Zonal LEDs); Z065040NM/X (40 Zonal LEDs); Z065020PM/X (20 Zonal LEDs, Printer, 2 Keyswitches).
8 Loop Variants	Z0850000M/X (Blank Module); Z085020NM/X (20 Zonal LEDs); Z085040NM/X (40 Zonal LEDs); Z085020PM/X (20 Zonal LEDs, Printer, 2 Keyswitches).



T 01942 322744 E sales@c-tec.co.uk  
F 01942 829867 W www.c-tec.com



C-TEC, Challenge Way, Martland Park, Wigan, WN5 0LD United Kingdom



T 01942 322744 E sales@c-tec.co.uk  
F 01942 829867 W www.c-tec.com



C-TEC, Challenge Way, Martland Park, Wigan, WN5 0LD United Kingdom