

## eMOTUS80D

### SURFACE MOUNT CABINETS

Outdoor Loudspeaker



#### PRODUCT OVERVIEW

ECLER ESSENTIALS eMOTUS80D is a 2-way full range loudspeaker cabinet with eMOTUS unique design. It features an 8" woofer and 1" tweeter and it's suitable for low and high impedance lines, with different power tap options.

eMOTUS80D is ready for indoor and outdoor applications, thanks to its aluminium grill and UV protection treatment (IP65-rated). Wall mount accessories and safety sling are included for an easy and secure installation.

#### KEY FEATURES

- 2-way cabinet, 8" woofer and 1" tweeter
- 100WRMS @ 8Ω
- Power selector: 60 / 30 / 15 / 7,5 / 3,5W @ 70/100V & 8Ω position
- IP65 rated
- Aluminium grill and UV protection treatment
- Back rubber cover for connections
- Includes wall bracket and security steel cable
- Available in black and white colour

#### APPLICATIONS

- Theme parks
- Gardens, nature parks and urban spaces
- Leisure centres
- Health and sport centres
- Museums
- Residential buildings, outdoor areas


## TECHNICAL SPECIFICATIONS

## eMOTUS80D


---

|                    |  |
|--------------------|--|
| Impedance          | 8 $\Omega$   |
| RMS power          | 100W   |
| Power options      | 100V: 60W / 30W / 15W / 7,5W / 8<br>70V: 60W / 30W / 15 / 7,5W / 3,75W / 8 |
| Sensitivity 1W/1m  | 89dB   |
| Dimensions (WxDxH) | 268x242x264mm<br>268x327x264mm (including brackets)                        |
| Weight             | 4,25kg / 9,37 lb.<br>4,75kg / 10,47 lb. (including accessories)            |





POLAR DIAGRAM

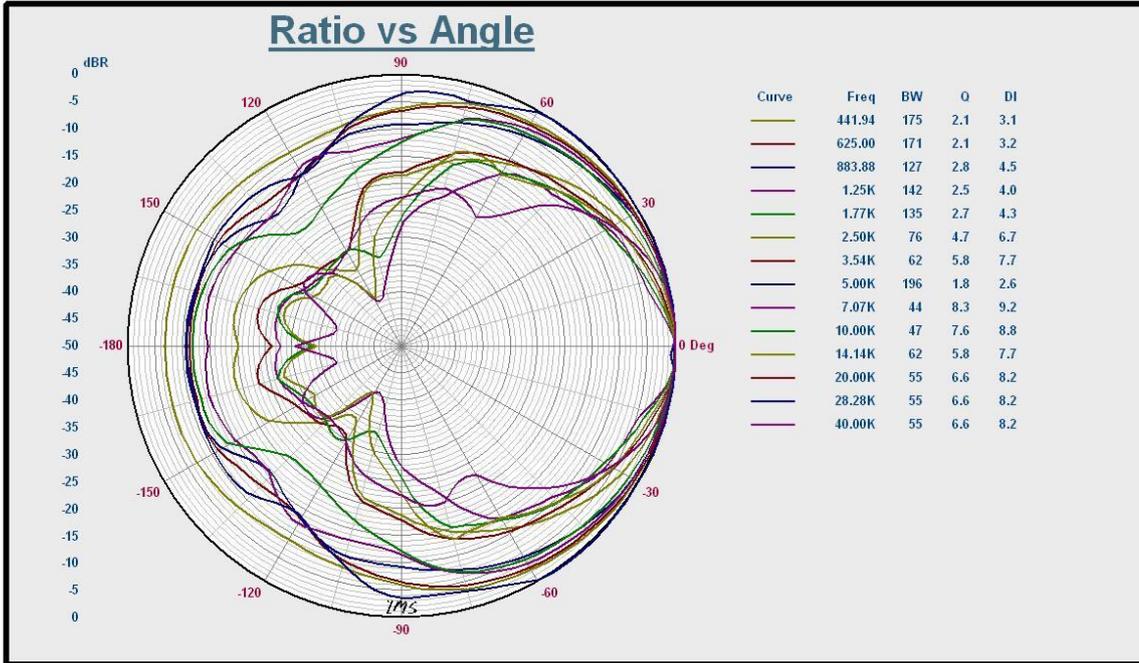

FREQUENCY RESPONSE

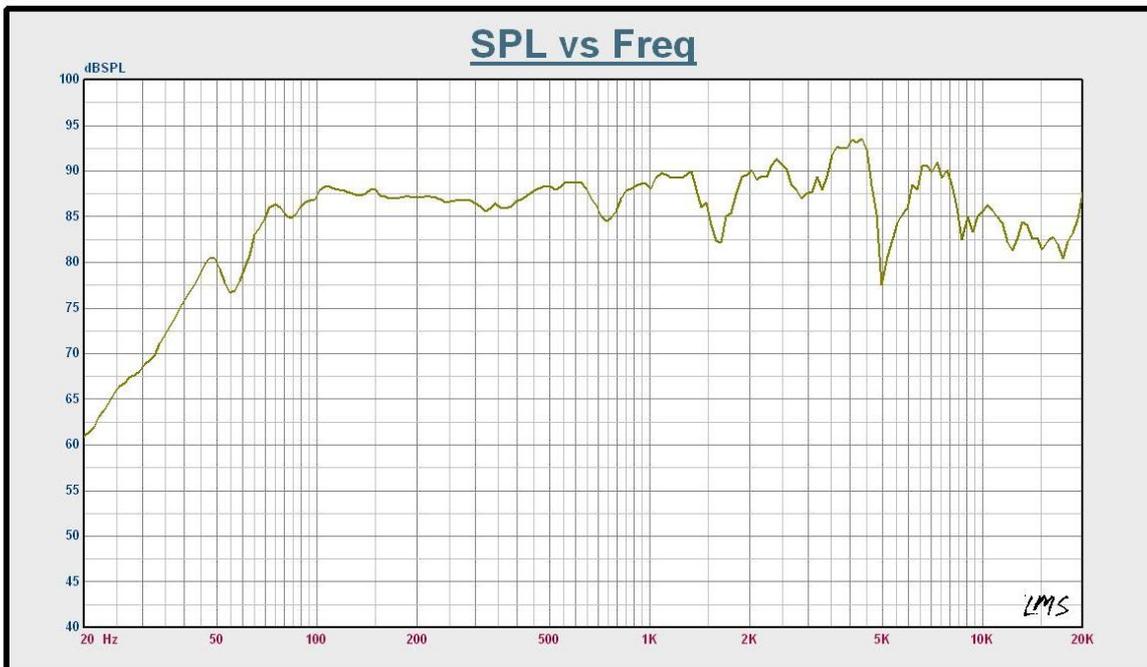

MECHANICAL DIAGRAM

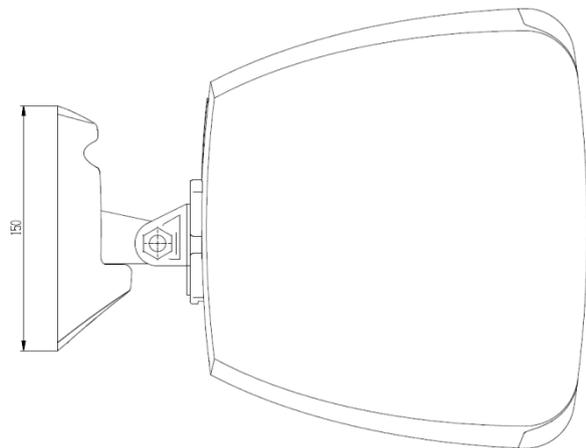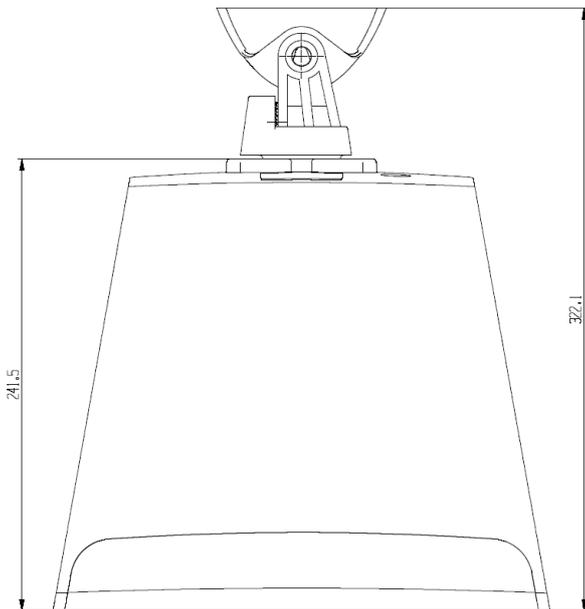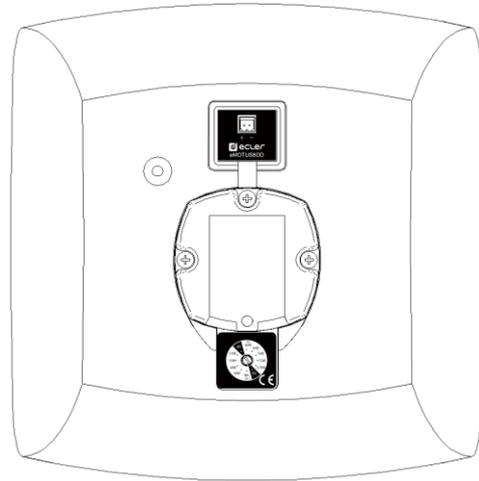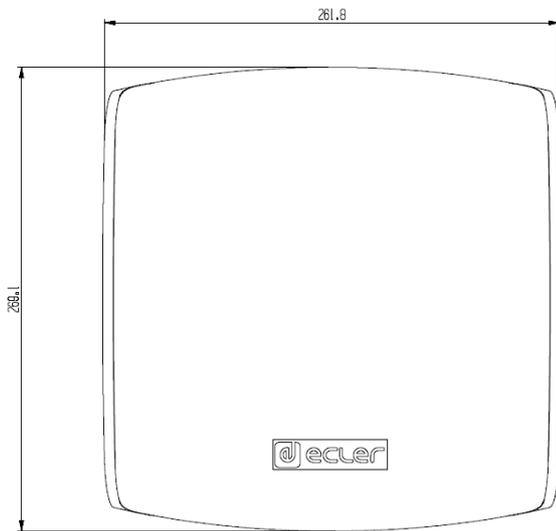



All product characteristics are subject to variation due to production tolerances. **NEEC AUDIO BARCELONA S.L.** reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.

Motors, 166-168 08038 Barcelona - Spain - (+34) 932238403 | [information@ecler.com](mailto:information@ecler.com) |