


Item	ISZ039
Description	Li-H(St)H ALARM C-4 (BC) 8x0.22 LSZH WHITE Cca s1d1a1
Application	Connection between sensors and control units in anti-intrusion systems. The insulation and sheath made with special Halogen Free (LSZH) compounds allowed to obtain the fire reaction class Cca-s1ad1a1. These cables can therefore be installed in buildings with a medium risk of fire (hospitals, shopping centers, etc.).

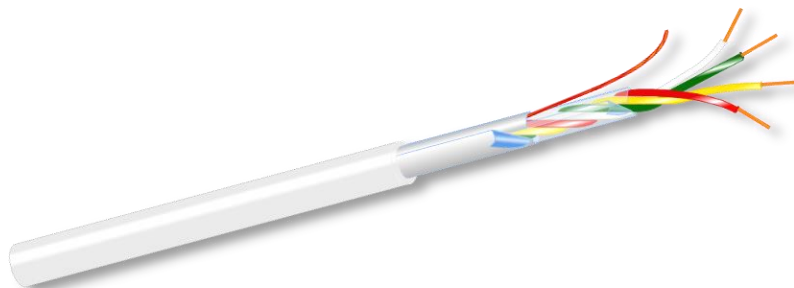

Marking

ISZ039 - PROSPECTA ALARM CABLE 8 x 0,22+T+S CEI-UNEL 36762 C-4 (U0=400 V) Cca s1d1a1 (*) (Metering) mt

Color Blue (*) = Lot of Production

Construction

Cores / Section		nr x mmq	8 x 0,22
Conductor 0,22	Material		Bare Copper (BC)
	Type		Stranded
	Construction	n x mm	7 x 0,15
Insulation	Material		Halogen-free LSZH T17
	Cores Identification		Colored
	Standard		Italia Color List
	Diameter	mm	1,00 ± 0,05
	Inner Conductor Resistance	Ohm/km	143,0
Cabling			Conductors cabled in concentric layers
Taping	Material		Transparent PET foil
Shield	Material		Aluminum / PET foil
	Thickness	µm	9/12
	Coverage	%	100
Drain Wire	Material		Bare Copper (BC)
	Construction	n x mm	7 x 0,15
Jacket	Material		Halogen-free LSZH M1
	Color		White RAL 9010
	Diameter	mm	5,10 ± 0,10
Weight		kg / km	38,0

Technical Data

Peak Operating Voltage		Volt	250
Voltage Rating Uo/U		Volt	400
Test Voltage		Volt (Ac)	2000
Insulation Resistance		MOhm / km	> 20
Temperature Range	Fixed Installation	°C	- 15 / + 70
Minimum Bending Radius	Fixed Installation		10 x Diameter

Standards

Fire Behaviour (according to EN 50575)	Euroclass Cca s1d1a1
DOP Nr.	F063

Product Manager
(Davide Eng. Bagnacani)

Issue date 11/05/2017
Version 11/05/2017
Print date 26/09/2019